
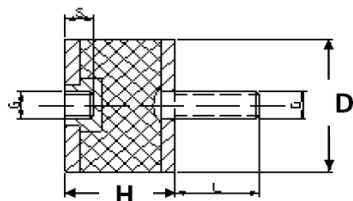



Typ B

NR - 55° 60° Shore

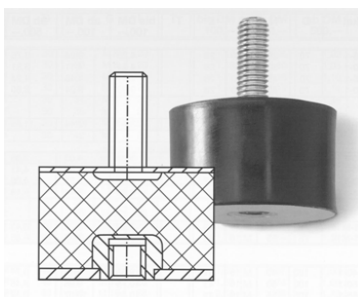

Nr Kat.	Typ Wymiar	Śruba	Śruba	Nacisk	Ugięcie	Ścinanie	Ugięcie
Nr Kat.	D/H	Gwint	Długość	F (max)	S (max)	F (max)	S (max)
	mm		mm	N	mm	N	mm
20-01449*	B 10/10	M4	10	56	0,9	10	2,3
20-00794	B 10/15	M4	10	52	1,5	23	3,8
20-00132	B 15/15 40° Sh	M4	13				
20-01698*	B 15/15	M4	10	115	1,4	50	3,8
20-00133	B 15/15	M4	13	115	1,4	50	3,8
20-01264*	B 20/15	M6	18	160	0,9	105	3,8
20-01265*	B 20/20	M6	18	160	1,2	90	5,0
20-01266	B 20/25	M6	18	150	2,5	90	6,3
20-01267*	B 25/15	M6	18	290	1,3	160	3,8
20-01268*	B 25/20	M6	18	280	2,1	145	5,0
20-00573*	B 25/25	M6	18	260	2,9	135	6,3
20-01016*	B 25/30	M6	18	250	3,2	135	7,5
20-01269	B 30/15	M8	20	676	1,4	208	3,4
20-00898*	B 30/20	M8	20	380	1,6	210	5,0
20-00464	B 30/25	M8	20	370	2,3	200	6,3
20-00575*	B 30/30	M8	20	355	2,8	190	7,5
20-01539	B 30/40	M8	20	300	3,2	100	8,0
20-00466*	B 40/30	M8	20	600	2,4	340	7,5
20-00821*	B 40/40	M8	23	600	3,8	330	10,0
20-01273	B 50/20	M10	28	1300	1,0	455	4,0
20-00577*	B 50/30	M10	28	1200	2,6	500	7,0
20-00578	B 50/40	M10	28	1100	3,6	315	10,0
20-01276	B 50/50	M10	28	1050	5,1	505	12,5
20-01278	B 60/35 new	M10	28				
20-00822	B 60/40 wycofany?	M10	28	1750	4,6	700	6,3
20-01283	B 75/50	M12	37	2600	4,3	1185	12,5
20-00471	B 75/55	M12	35	2400	4,7	1170	13,8
20-00824	B 75/55	M12	37	2400	4,7	1170	13,8
20-00160	B 75/55 40° Sh	M12	37				
20-00581	B 100/40	M16	41	6500	3,2	2310	10,0
20-01285	B 100/55	M16	41	5100	5,0	2180	13,8
20-01286	B 100/60	M16	41	5000	5,6	2125	15,0

Inne wymiary na zapytanie

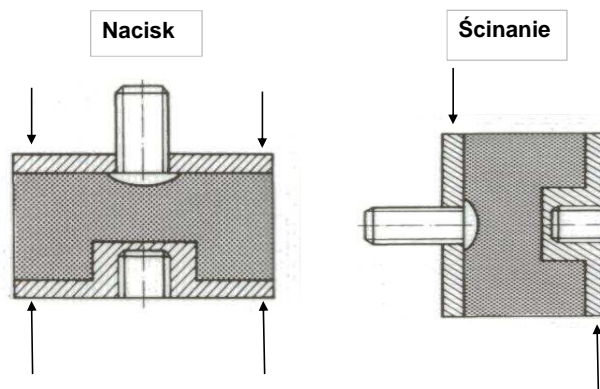

Pomoc Techniczna: tel.: 22-771-4687, tel. kom.: 664-219-805, e-mail: wibroszczel@o2.pl