




Typ D

NR - 55°- 60° Shore

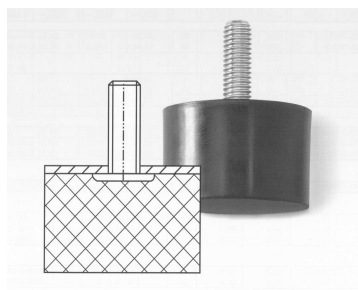

Nr Kat	Typ Wymiar	Śruba	Śruba	Nacisk	Ugięcie
	D/H	Gwint	Długość	F (max)	S (max)
	mm		mm	N	mm
20-01542*	D 10/10	M4	10	59	1
20-01459*	D 15/15	M4	13	115	2
20-00685	D 20/10	M6	8	170	1,1
20-00483	D 20/10	M6	15	170	1,1
20-01561	D 20/10	M6	18	170	1,1
20-01338*	D 20/15	M6	18	160	1,4
20-01339	D 20/20	M6	18	160	1,9
20-00214	D 20/25	M6	15	150	2,8
20-01340	D 20/25	M6	18	150	2,8
20-01342	D 25/10	M6	18	300	0,8
20-01015	D 25/15	M6	18	290	1,5
20-01346	D 25/20	M6	18	280	2,3
20-00490	D 30/15	M8	20	350	3,1
20-00597	D 30/17	M8	20		
20-01461*	D 30/20	M8	20	350	4,4
20-00604	D 30/25	M8	20	350	5,8
20-00605	D 30/25	M8	25	350	5,8
20-00492	D 30/30	M8	20	350	7,2
20-01562	D 40/25	M8	23	1044	2
20-00224	D 40/30	M10	20	660	3,3
20-01462*	D 40/30	M8	23	660	3,3
20-01365	D 40/40	M8	23	600	4,6
20-00602*	D 50/20	M10	28	1500	2
20-00601	D 50/30	M10	28	1200	3,3
20-01369	D 50/40	M10	28	1100	4,3
20-01370	D 50/45	M10	28	1050	5,1
20-00649	D 75/25	M12	27	5446	2,5
xxxxxxx	D 75/40	M12		2900	4
20-01382	D 75/50	M12	37		
xxxxxxx	D 100/40	M16		6600	3,6
xxxxxxx	D 100/50	M16		5400	5

Nacisk



Inne wymiary na zapytanie

Pomoc Techniczna: tel.: 22-771-4687, tel. kom.: 664-219-805, e-mail: wibroszczel@o2.pl

WIBROSZCZEL Waldemar Jastrzębski ul. Ostrowska 54, 18-300 Zambrów, NIP: 723-130-26-09, REGON: 200350573
tel/fax: 86-271-0801, tel: 22-771-4687; e-mail: wibroszczel@o2.pl; wibroszczel@wibroszczel.pl